
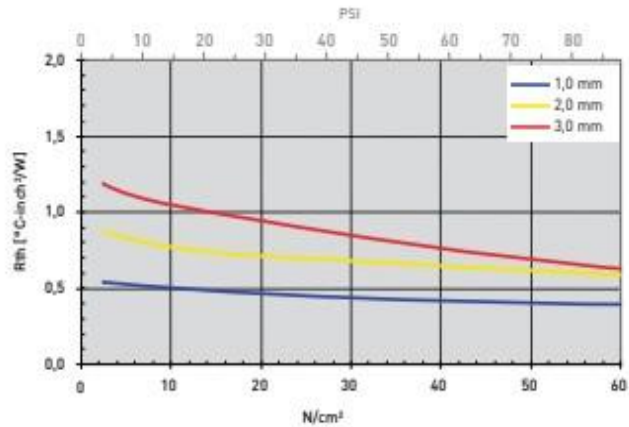


SG-TC3.3 Soft Gap Pad		Thickness: 0.020" / 0.50mm	
<i>Thermal Conductivity</i>	3.3 W/m-K	<i>Thermal Impedance @ 10 PSI</i>	0.31 °C in ² / W
<i>Category</i>	Silicone Gap Pad	<i>Thermal Impedance @ 30 PSI</i>	0.29 °C in ² / W
<i>Chemistry</i>	Ceramic Filled Silicone	<i>Thermal Impedance @ 60 PSI</i>	0.26 °C in ² / W
<i>Reinforcement</i>	NONE	<i>Hardness</i>	45 (Shore 00)
<i>Available Formats</i>	Sheets or Cut Parts	<i>Operating Temp</i>	-40C to 150C
<i>Surface Tack</i>	Tacky one side by film laminate	<i>Dielectric Strength</i>	> 10 kV/mm
		<i>Volume Resistivity</i>	1.0 x 10 ¹⁰ ohm-cm
		Thickness: 0.078" / 2.0mm	
<i>Thickness:</i>	0.040" / 1.0mm	<i>Thermal Impedance @ 10 PSI</i>	0.80 °C in ² / W
<i>Thermal Impedance @ 10 PSI</i>	0.51 °C in ² / W	<i>Thermal Impedance @ 30 PSI</i>	0.70 °C in ² / W
<i>Thermal Impedance @ 30 PSI</i>	0.45 °C in ² / W	<i>Thermal Impedance @ 60 PSI</i>	0.63 °C in ² / W
<i>Thermal Impedance @ 60 PSI</i>	0.40 °C in ² / W	<i>Hardness</i>	45 (Shore 00)
<i>Hardness</i>	45 (Shore 00)	<i>Operating Temp</i>	-40C to 150C
<i>Operating Temp</i>	-40C to 150C	<i>Dielectric Strength</i>	> 10 kV/mm
<i>Dielectric Strength</i>	> 10 kV/mm	<i>Volume Resistivity</i>	1.0 x 10 ¹⁰ ohm-cm
<i>Volume Resistivity</i>	1.0 x 10 ¹⁰ ohm-cm		

RoHS Compliant
UL Certification

Yes
UL94-V0

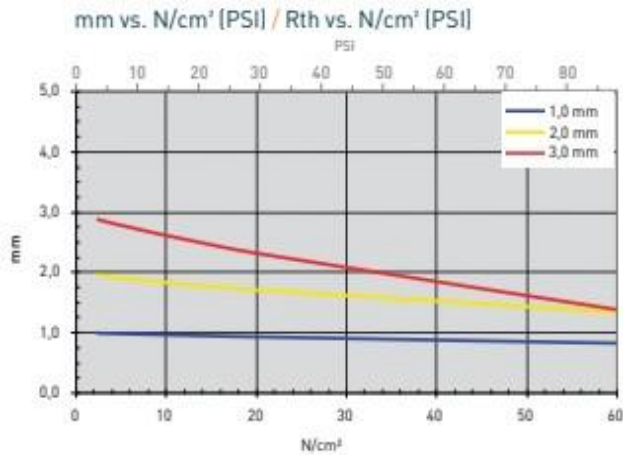

Streuter Technologies, Inc. (dba: Fastel, Timtel) - ISO 9001:2015
 208 Avenida Fabricante, Bldg 200, San Clemente, CA 92672 United States
 TF: 1-888-989-3832 (USA) International: +1-949-369-7676
 Visit us at www.streuter.com

Driving Material Science into Solutions™